

Applications

- Right Hand Circular Polarized High Power Counter Drone Antenna
- High Power Counter GNSS Antenna (Counter GPS Antenna) Covering Low Band GNSS Frequencies
- Drone Jamming Antenna
- High Power Jamming Antenna
- High Power Communication Antenna
- Designed for High Performance at 200 Watt Continuous Power (%100 duty cycle)
- Vehicle Antenna
- Wideband Monitoring Antenna
- Fixed-Site Antenna









Specifications

Frequency Band and VSWR	1100-1350 MHz \leq 1.5:1
Nominal Impedance	50 ohm
Power Rating	200 Watt Continuous (Tested)
Antenna Gain	11.9-13.6 dBi depending on the frequency (See antenna gain graph)
Beamwidth	Between 25° and 40.4° depending on the frequency (See antenna beamwidth graph)
Connector	N-Female
Radiation Pattern	Directional
Polarization	Right Hand Circular Polarized (RHCP)
Radome	Fiber Glass Radome
Dimensions	770 mm (Height) X 245 mm (Diameter)
Colour	Dark Green (Ask for other colours)
Waterproof	Waterproof



Typical antenna parameters are given in the next pages:

HP-AMHA-11001350 Right Hand Circular Polarized High Power Axial Model Helical Antenna

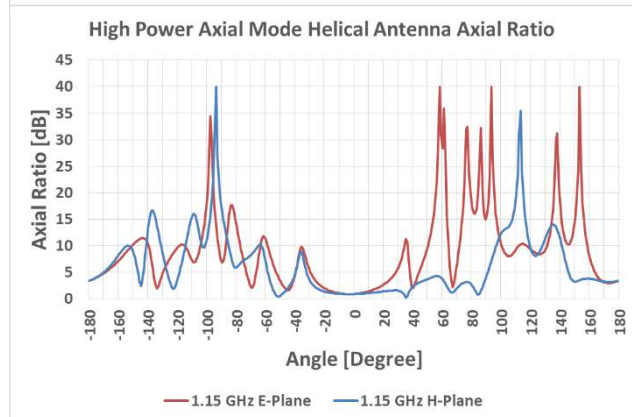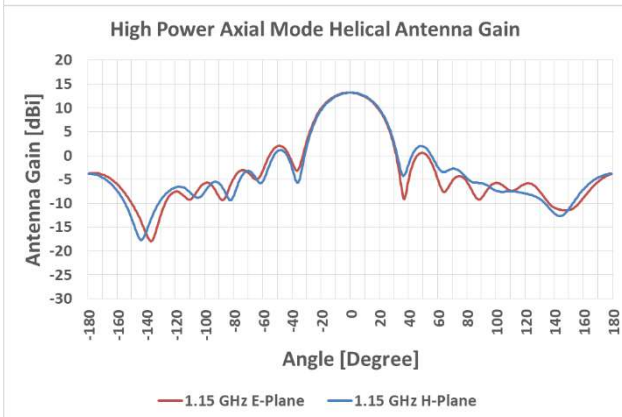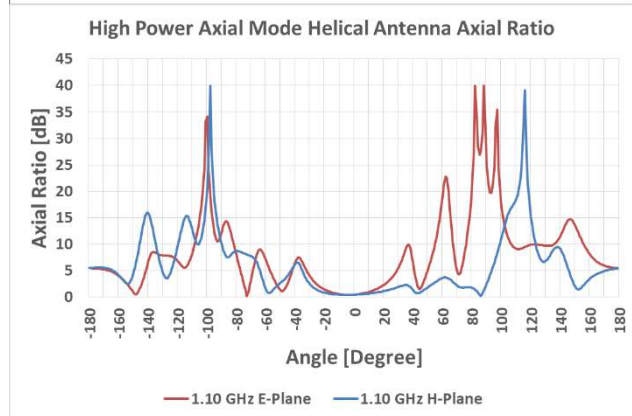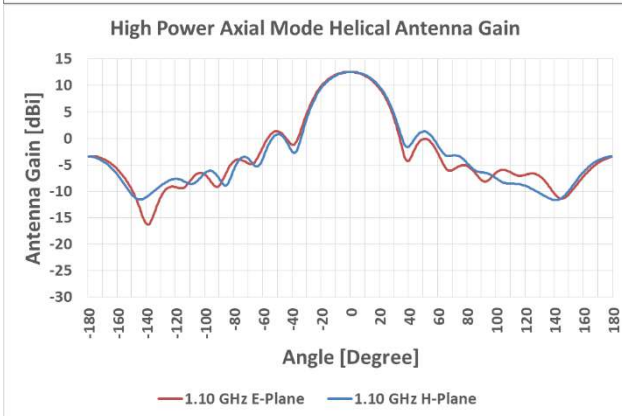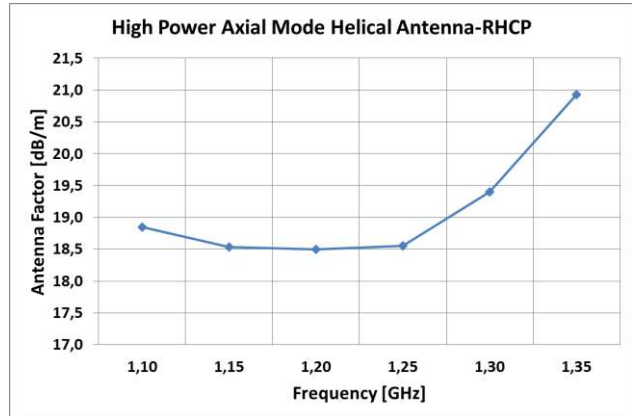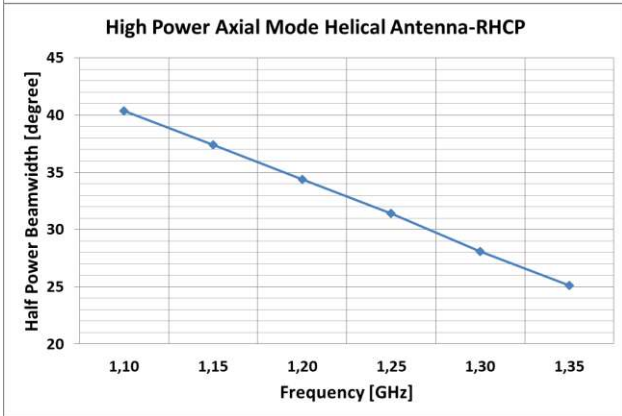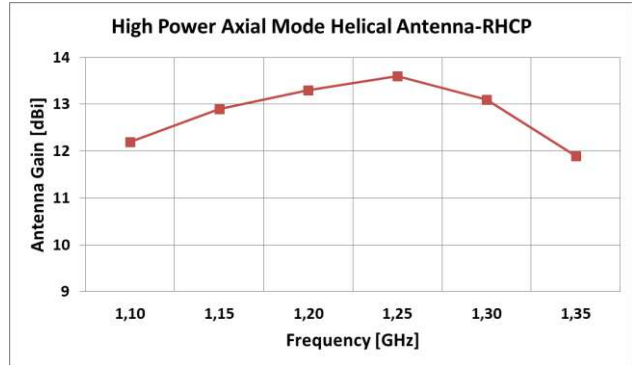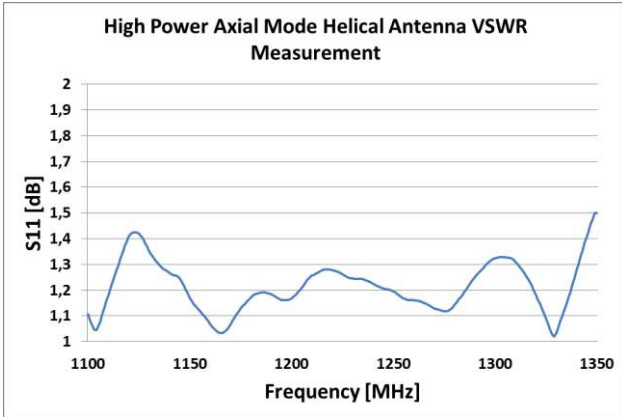

HP-AMHA-11001350

Right Hand Circular Polarized High Power Axial Model Helical Antenna

